DISPLAY FREEZER (0°F)

Model: 1FNGD

Natural Refrigerant R-290 Model

1-Section Display Reach-In Freezer with Hinged Glass Door

1FNGD - Stainless steel front, aluminum end panels and interior

1FNSAGD - Stainless steel exterior, aluminum interior

1FNSSGD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pan slide assemblies
Add'l epoxy-coated steel shelves	Adjustable legs
Chrome or stainless steel shelves	Pass-thru (consult factory)
Heavy-duty pilaster strips	Special electrical req. (consult factory)
Rehinging of door (consult factory)	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Self contained, performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass door

Chrome-plated door handle

Cam action, lift-off hinges

Self-closing door

Magnetic snap-in door gasket

Cylinder lock in door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA
Net Capacity (cu. ft.)

Dimensional Dime	
Net Capacity (cu. ft.)	20 (566 cu I)
Width, Overall (in.)	26 (660 mm)

35 3/8 (899 mm) Depth, Overall (in.) (incl. handle) Depth (in.) (less door) 32 (813 mm)

Depth (in.) (door open 90°) 55 1/2 (1410 mm)

Clear Door Width (in.) 19 3/8 (492 mm) Clear Door Height (in.) 58 5/8 (1489 mm)

Height, Overall (in.) (incl. 5" casters) 82 1/4 (2089 mm)

No. of Doors 1 4 No. of Shelves

Shelf Area (sq. ft.) 20.4 (1.9 sq m)

Tray Slide Capacity 24

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	2470

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	8.2 (5.8)
Defrost Amps (int'l)	4.4 (3.2)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu I)
Weight Std - Crated (lbs.)	330 (150 kg)
Weight SS - Crated (lbs.)	390 (177 kg)

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

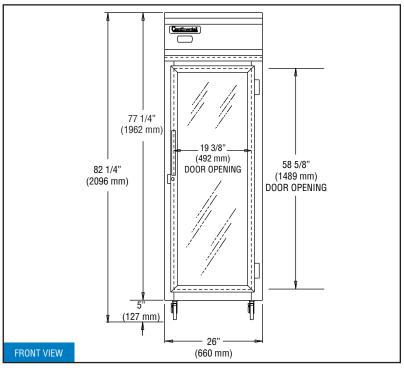

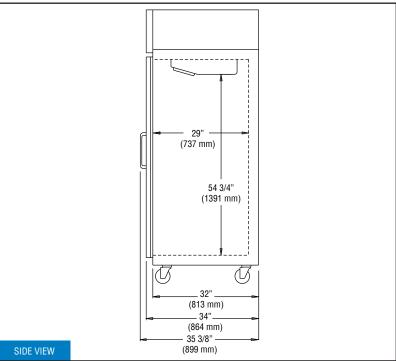

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.