REACH-IN REFRIGERATOR

Model: **3RNHD**

Natural Refrigerant R-290 Model

3-Section Reach-In Refrigerator with Half Doors

ENERGY STAR[®] Qualified Commercial Refrigerator

3RNHD - Stainless steel front, aluminum end panels and interior **3RNSAHD** - Stainless steel exterior, aluminum interior **3RNSSHD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Custom laminates	
Add'l epoxy-coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Heavy-duty pilaster strips	One way security screws	
Rehinging of doors (consult factory)	• Locking hasp (lock not included)	
Pan slide assemblies	Stainless steel mesh cover	
Wine rack	Coverless hinges	
Adjustable legs		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Automatic, electric condensate evaporator Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap-in door gaskets
Cylinder lock in each door
Heavy-duty, epoxy-coated steel shelves
5" casters

MODEL FEATURES

LED interior lighting Electronic controller w/digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA 70 (1982 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 78 (1981 mm) Depth, Overall (in.) (incl. handles) 35 3/8 (899 mm) Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 55 1/2 (1410 mm) Clear Door Width (in.) 19 3/8 (492 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) Height, Overall (in.) (incl. 5" casters) 82 1/4 (2089 mm) No. of Half Doors 6 No. of Shelves 9 Shelf Area (sq. ft.) 61.2 (5.7 sq m) Tray Slide Capacity (per half section) 11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

ELECTRICAL DATA


Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	8.5 (5.3)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (3766 cu l)
Weight Std - Crated (lbs.)	725 (329 kg)
Weight SS - Crated (lbs.)	840 (381 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Model Plan Views

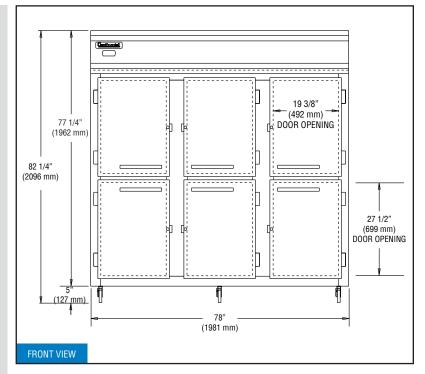

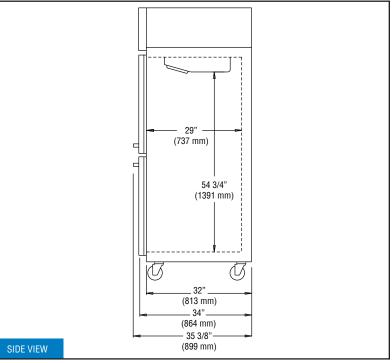

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.