## REACH-IN REFRIGERATOR

### **Model: 3RENHD**

Natural Refrigerant R-290 Model

# 3-Section Extra-Wide Reach-In Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

3RENHD - Stainless steel front, aluminum end panels and interior

3RENSAHD - Stainless steel exterior, aluminum interior

3RENSSHD - Stainless steel exterior and interior



#### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Custom laminates
Add'l epoxy-coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Heavy-duty pilaster strips	One way security screws
Rehinging of doors (consult factory)	Locking hasp (lock not included)
Pan slide assemblies	Stainless steel mesh cover
Wine rack	Coverless hinges
Adjustable legs	

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Lucation.		
Item No:	Quantity:	
	_	

#### **Standard Model Features**

SIS #:

#### REFRIGERATION SYSTEM

AIA #:

Self contained, performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

5" casters

#### **MODEL FEATURES**

LED interior lighting

Electronic controller w/digital display & hi-low alarm

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

#### **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	73 (2067 cu I)
Width, Overall (in.)	85 1/2 (2172 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	58 (1473 mm)
Clear Door Width (in.)	21 7/8 (556 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Doors	6
No. of Shelves	9
Shelf Area (sq. ft.)	61.2 (5.7 sq m)
Tray Slide Capacity (per half section)	11

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	8.5 (5.3)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	181 (5125 cu l)
Weight Std - Crated (lbs.)	785 (356 kg)
Weight SS - Crated (lbs.)	825 (374 kg)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

#### **Model Plan Views**

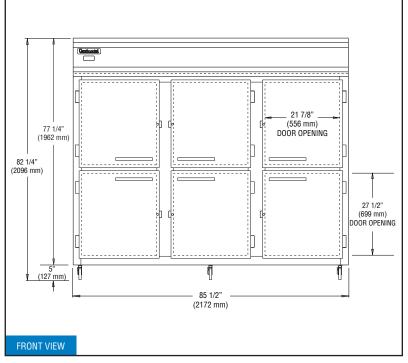

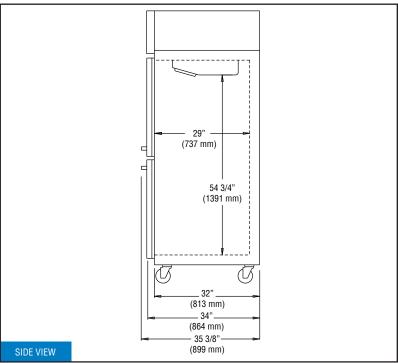

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.