GRIDDLE STAND REFRIGERATOR

Model: D48GN

Natural Refrigerant R-290 Model

48" Griddle Stand Refrigerator

Stainless steel exterior and interior, reinforced stainless steel work top with drip guard marine edge and stainless steel case back.



Options and Accessories

(upcharge and lead times may apply)			
Flat top in lieu of marine edge	Integral heat shield top		
16-gauge stainless steel top (flat or marine)	Cylinder locks		
Top extensions (flat or marine edge)	Doors in lieu of drawers		
Condensing unit left (standard on right)	Special electrical requirements (consult factory)		

Consult factory for other model configurations, options and accessories.

Project Name: Model Specified: Location: Item No: Quantity: AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, front slide-out condensing unit

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Easy glide, fully extendable drawers designed to hold 6" deep pans side-by-side Smooth, polished chrome drawer handles One-piece, snap-in magnetic drawer gaskets Heavy-duty drawer track with built-in drawer safety clips Drawers designed to hold 250 lb. capacity (2) drawer pan divider bars*

4" casters on support plates

* Pans supplied by others

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm Front breathing

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA 9.0 (255 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 48 (1219 mm) 35 5/16 (897 mm) Depth, Overall (in.) (incl. handles) Height, Overall (in.) (incl. 4" casters) 26 3/8 (670 mm) 2 No. of Drawers

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	2.5 (1.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

CM2-0764

Weight (lbs.)	450 (204 kg)
Height - Crated (in.)	44 (1118 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	39 (991 mm)

DRAWER PAN DIVIDERS (supplied with model)

2	(one	ner
<u> </u>		pui

drawer)


See drawer pan configurations on right (pans not supplied). For other drawer pan configurations, consult factory.

TOP WEIGHT CAPACITY

Max. Top Weight Capacity (lbs.)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579


775 (352 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.





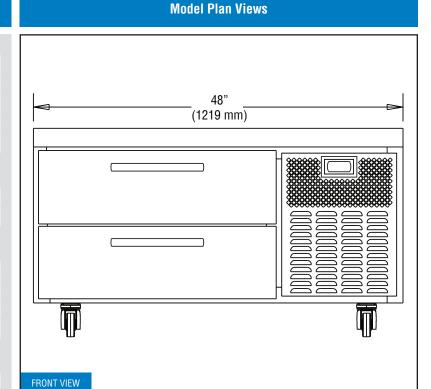

35 5/16" (897 mm) 33 9/16" (853 mm) 26 1/8" 26 3/8" (664 mm) (670 mm) то тор OVERALL SURFACE 4 5/16' 6 (110 mm) SIDE VIEW

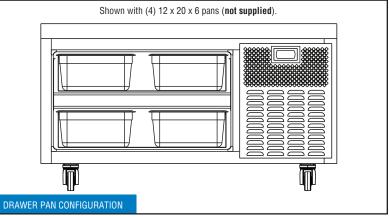

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.