# GRIDDLE STAND REFRIGERATOR

## Model: D60GN

Natural Refrigerant R-290 Model

## 60" Griddle Stand Refrigerator

Stainless steel exterior and interior, reinforced stainless steel work top with drip guard marine edge and stainless steel case back.



### **Options and Accessories**

(upcharge and lead times may apply)			
Flat top in lieu of marine edge	Integral heat shield top		
16-gauge stainless steel top (flat or marine)	Cylinder locks		
Top extensions (flat or marine edge)	Special electrical requirements (consult factory)		
Condensing unit left (standard on right)	Doors in lieu of drawers		

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

### **REFRIGERATION SYSTEM**

Performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup> Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, front slide-out condensing unit Expansion valve system

### **CABINET ARCHITECTURE**

High density, non-CFC polyurethane foamed-in-place insulation Easy glide, fully extendable drawers designed to hold 6" deep pans side-by-side Smooth, polished chrome drawer handles One-piece, snap-in magnetic drawer gaskets Heavy-duty drawer track with built-in drawer safety clips Drawers designed to hold 250 lb. capacity (4) drawer pan divider bars\* 4" casters on support plates \* Pans supplied by others

### **MODEL FEATURES**

Electronic controller w/digital display & hi-low alarm Front breathing

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

**APPROVAL:** 

## **Model Specifications**

#### **DIMENSIONAL DATA** 12.7 (360 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 60 (1524 mm) 35 5/16 (897 mm) Depth, Overall (in.) (incl. handles) Height, Overall (in.) (incl. 4" casters) 26 3/8 (670 mm) 2 No. of Drawers

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU/Hr)*	2610

#### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	4.2 (2.0)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

CM2-0682

Weight (lbs.)	495 (225 kg)
Height - Crated (in.)	44 (1118 mm)
Width - Crated (in.)	78 (1981 mm)
Depth - Crated (in.)	39 (991 mm)

#### DRAWER PAN DIVIDERS (supplied with model)

4	(two	ner	drawer)	١
T		pui	uluwol	1


See drawer pan configurations on right (pans not supplied). For other drawer pan configurations, consult factory.

#### **TOP WEIGHT CAPACITY**

Max. Top Weight Capacity (lbs.)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit







1000 (454 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.

A Division of National Refrigeration & Air Conditioning Products, Inc.





© Copyright 2020. Continental Refrigerator.

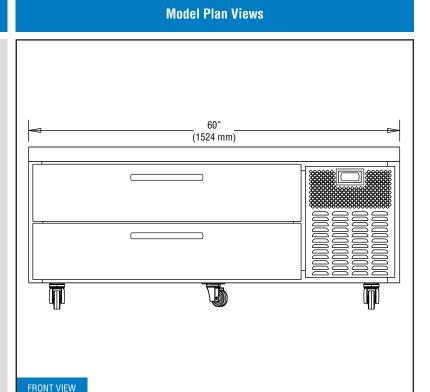

## 35 5/16" (897 mm) 33 9/16" (853 mm) 26 1/8" 26 3/8" (664 mm) (670 mm) то тор OVERALL SURFACE 4 5/16' 6 (110 mm) SIDE VIEW

