DESIGNER LINE UNDERCOUNTER REFRIGERATOR



Natural Refrigerant R-290 Model

Model: D60N-U

60" Undercounter Refrigerator with Solid Doors

ENERGY STAR[®] Qualified Commercial Refrigerator

Stainless steel front, top, end panels and interior, aluminum back.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel back	Expansion valve system	
Add'I epoxy-coated steel shelves	Door locks	
Stainless steel shelves	Special electrical requirements (consult factory)	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Natural, environmentally-safe, high-efficiency R-290 refrigerant ¹
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
Completely enclosed, vented and removable case back
1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm Field rehingeable doors

2" high, bottom mounted front breather air divider

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA 17.0 (481 cu l) Net Capacity (cu. ft.) Width, Overall (in.) 60 (1524 mm) Depth, Overall (in.) 32 3/16 (818 mm) (incl. handles & bumpers) Height, Overall (in.) 31 13/16 (808 mm) (incl. 1 3/8" plate casters) Shelf Area (sq. ft.) 8.1 (.8 sq m) No. of Shelves 2 No. of Doors 2 Interior Depth (in.) See Drawing 26 1/4 (667 mm) Interior Height (in.) Interior Width (in.) 56 (1422 mm)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1625

ELECTRICAL DATA


Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	2.46 (1.85)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	315 (143 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	68 (1727 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.






MADE IN THE U.S.A.

60" (1524 mm)

FRONT VIEW

Model Plan Views

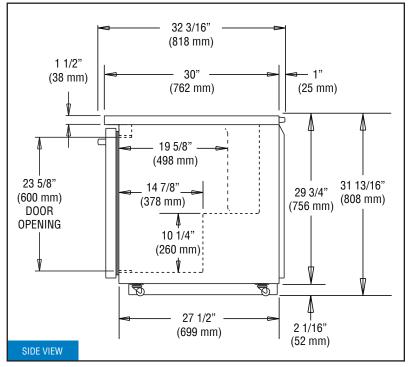

NOTE: For proper operation, the area under and in front of the cabinet must not be obstructed in any way.