SANDWICH UNIT REFRIGERATOR

Model: SW27N12M-D

Natural Refrigerant R-290 Model

27" Mighty Top Sandwich Unit Refrigerator with Drawers - 12 Pans

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel interior	Rear-mounted cutting board
Stainless steel back	Composite cutting board
Overshelves (single or double)	Flat insulated night cover
Drawer locks	Vision panel lid
Adjustable legs	Modified pan openings
Optional caster sizes	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Location.	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Unique air flow distribution allows pan product to maintain 33° - 41°F Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome drawer handles
Stainless steel roll-out drawers
Magnetic snap-in drawer gaskets
8" deep, full length nylon cutting board
Insulated lid
Completely enclosed, vented and removable case back
5" casters

MODEL FEATURES

(12) 1/6 size recessed pans, 4" deepRemovable interior tub below pansElectronic controller w/digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATANet Capacity (cu. ft.)7.4 (210 cu l)1/6 Size Pans (4" deep)12Width, Overall (in.)27 1/2 (699 mm)Depth, Overall (in.) (incl. bumpers)35 (890 mm)Depth, Cutting Board (in.)8 (203 mm)Height, Overall (in.) (incl. 5" casters)42 1/4 (1073 mm)No. of Drawers (two tier)2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1625

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	2.46 (1.85)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	188 (85 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	35 1/2 (902 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

* Rating @ $+25^{\circ}F$ evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.






Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.








FRONT VIEW

35" (890 mm) 34" 1" (864 mm) (25 mm) 15 5/8" (397 mm) Ч 42 1/4" (768 mm) (1073 mm) 5 \. (127 mm) 27 1/2" (699 mm) SIDE VIEW

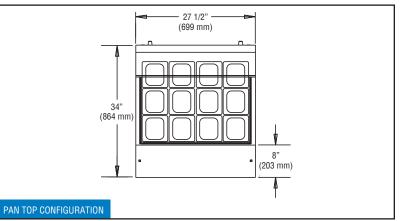

Model Plan Views

27 1/2"

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.