
## WORKTOP REFRIGERATOR

### Model: SW72NBS-D

Natural Refrigerant R-290 Model

# 72" Worktop Refrigerator with Drawers and 5 1/2" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.



# Continental

### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Adjustable legs
Stainless steel back	Drawers locks
Overshelves (single or double)	Special electrical requirements (consult factory)
Expansion valve system	

Consult factory for other model configurations, options and accessories.

### Standard Model Features

### REFRIGERATION SYSTEM

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer handles

Stainless steel roll-out drawers

Magnetic snap-in drawer gaskets

Completely enclosed, vented and removable case back

5" casters

### **MODEL FEATURES**

Electronic controller w/digital display & hi-low alarm

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

### **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20.6 (583 cu I)
Width, Overall (in.)	72 (1829 mm)
Depth, Overall (in.) (incl. handles & bumpers)	32 3/16 (818 mm)
Height, Overall (in.) (incl. 5" casters)	40 3/4 (1035 mm)

6

### **REFRIGERANT DATA**

No. of Drawers (two tier)

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1625

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	2.46 (1.85)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### **SHIPPING DATA**

Weight (lbs.)	334 (151 kg)
Height - Crated (in.)	48 3/4 (1238 mm)
Width - Crated (in.)	80 (2032 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

### **DRAWER PAN CONFIGURATIONS**

**Two Tier**: (1)  $12 \times 18 \times 6$  pan per drawer or (1) 1/2 size  $\times 6 \& (1) 1/3$  size  $\times 6$  pans per drawer

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

### **Model Plan Views**

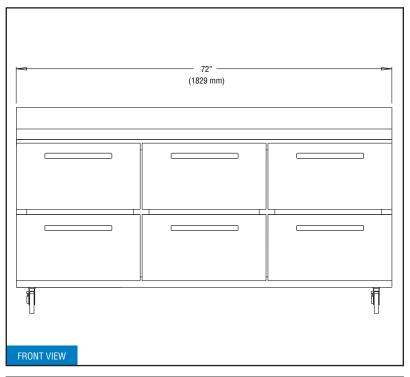

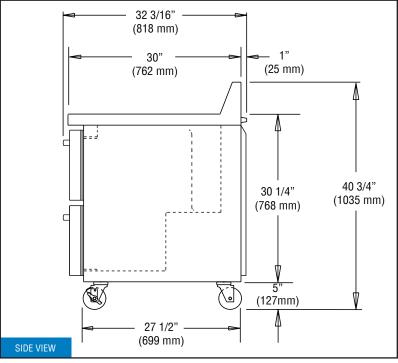

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>