REACH-IN FREEZER (0°F)

Model: DL3FE-HD



3-Section Extra-Wide Reach-In Freezer with Half Doors

DL3FE-HD - Stainless steel front, aluminum end panels and interior DL3FE-SA-HD - Stainless steel exterior, aluminum interior DL3FE-SS-HD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Custom laminates	
Add'l epoxy-coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Pan slide assemblies	Locking hasp (lock not included)	
Expansion valve system	Stainless steel mesh cover	
Casters	Coverless hinges	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system Environmentally-safe, R-404A refrigerant Refrigeration system is readily accessible on top of cabinet, separate from the "food zone" Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap-in door gaskets
Cylinder lock in each door
Heavy-duty, epoxy-coated steel shelves
Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site Automatic electric defrost

APPROVAL:

Model Specifications

Net Capacity (cu. ft.) 75 (2124 cu l) Width, Overall (in.) 85 1/2 (2172 mm) Depth, Overall (in.) (incl. handles) 35 3/8 (899 mm) Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 58 (1473 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6 No. of Shelves 9	DIMENSIONAL DATA	
Depth, Overall (in.) (incl. handles) 35 3/8 (899 mm) Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 58 (1473 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6	Net Capacity (cu. ft.)	75 (2124 cu l)
Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 58 (1473 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6	Width, Overall (in.)	85 1/2 (2172 mm)
Depth (in.) (doors open 90°) 58 (1473 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6	Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Clear Door Width (in.)21 7/8 (556 mm)Clear Half Door Height (in.)27 1/2 (699 mm)Height, Overall (in.) (incl. 6" legs)83 1/4 (2115 mm)No. of Doors6	Depth (in.) (less doors)	32 (813 mm)
Clear Half Door Height (in.)27 1/2 (699 mm)Height, Overall (in.) (incl. 6" legs)83 1/4 (2115 mm)No. of Doors6	Depth (in.) (doors open 90°)	58 (1473 mm)
Height, Overall (in.) (incl. 6" legs) 83 1/4 (2115 mm) No. of Doors 6	Clear Door Width (in.)	21 7/8 (556 mm)
No. of Doors 6	Clear Half Door Height (in.)	27 1/2 (699 mm)
	Height, Overall (in.) (incl. 6" legs)	83 1/4 (2115 mm)
No. of Shelves 9	No. of Doors	6
	No. of Shelves	9
Shelf Area (sq. ft.) 61.2 (5.7 sq m)	Shelf Area (sq. ft.)	61.2 (5.7 sq m)
Tray Slide Capacity (per half section) 11	Tray Slide Capacity (per half section)	11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr)*	3575

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	11.9 (10.7)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)


SHIPPING DATA


Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	90 (2286 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	187 (5295 cu l)
Weight Std - Crated (lbs.)	860 (390 kg)
Weight SS - Crated (lbs.)	925 (420 kg)

* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

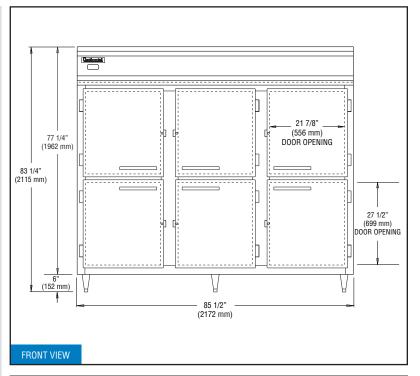

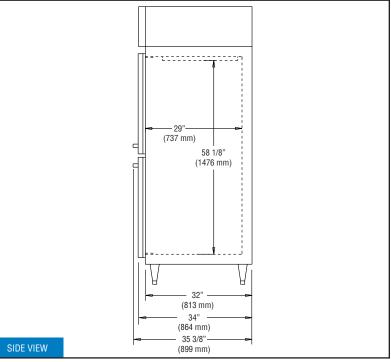



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.