



F18MCV

F18MCV

31.5" (80cm) Deep Self-Contained Mega Top Salad Tables

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- F18MC39AV (6) 1/6 pan capacity, 39" length
- F18MC39DV (12) 1/6 pan capacity, 39" length
- F18MC52AV (6) 1/6 pan capacity, 52" length
- F18MC52DV (12) 1/6 pan capacity, 52" length
- F18MC52EV (18) 1/6 pan capacity, 52" length
- F18MC60AV (6) 1/6 pan capacity, 60" length
- F18MC60DV (12) 1/6 pan capacity, 60" length
- F18MC60EV (18) 1/6 pan capacity, 60" length
- F18MC60FV (24) 1/6 pan capacity, 60" length



F18MC39AV

Standard Features

- 16-gauge stainless steel top construction
- Unfinished ends
- Interior sub-top is made of ABS plastic
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation throughout unit
- Refrigerated base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handle held in with a positive lock system
- Electronic Control
- 14-gauge leg rails run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- 8' cord and plug
- Environmentally friendly HFC-404A refrigerant
- Cold pan to have 2BF stainless steel interior with pans recessed 2.00"
- Cold pan is sized for three 1/6-size pans deep. Pans and adapter bars by others
- Cold pan has a on/off switch and maintains NSF7 temperatures utilizing a pressure control
- Interior base cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Refrigerator interior maintains 36° to 40° at 100° ambient room temperature
- One year parts and 90 day labor standard warranty

Options & Accessories

- Available with LiquiTec cooling pan
- Remote refrigeration (contact factory)Stainless steel end or back
- Laminate facing (full front)
- Polyethylene or composite cutting board
- Tray rack
- Fixed or adjustable height casters
- Drawers in lieu of door, 19", 27" or 32"
- Locks
- Cold pan drain
- 230V/50 cycle*
- Celsius readout for electronic control
- Fan assist package for rail
- Temp control viewing lens on mechanical housing
- *Inclusion of this option will alter the electrical specifications

Specifications

Exterior Top: Constructed of one-piece 16-gauge stainless steel, with integral 2.12" (5.4cm) high square nosing at the front, and 4" (10.2cm) high by 2" (5.1cm) deep backsplash at the rear. Top has opening for use with 1/6 size pans. Pans and adapter bars supplied by others. Pans are recessed 3" (7.6cm) or 2" (5.1cm) and rest on pan supports. Pan opening has 20-gauge stainless steel removable hinged cover(s). Temperature in top opening maintains 33°F (1°C) to 41°F (5°C), with pans recessed 3" (7.6cm), at 86°F ambient room temperature, meeting NSF7 requirements.

Exterior back and bottom are 24-gauge galvanized steel. Exterior ends are 18-gauge galvanized steel.

Base Interior: has 22-gauge stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with 1.5" (3.8cm) of high-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane.

Door(s) have a 22-gauge stainless steel exterior front,

with a thermoformed ABS plastic interior liner. Door(s) have a black recessed handle and a snap-in magnetic gasket which is easily replaceable.

Base has a machine compartment, standard on the right, condensing unit with condensate evaporator and an electrical junction box installed. Machine compartment has a louver for access to condensing unit. Blower coil(s) are located behind the door mullions, and refrigerate the cabinet. Refrigeration system uses HFC-404A refrigerant, and maintains 36°F (2°C) to 40°F (4°C) interior cabinet temperature in the base.


Electronic control for base reads air temperature. Electronic control for rail displays temperature for set point purposes only. Display does not reflect air or product temps in unit. On/Off switches for rail and base are located behind the louvered panel.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.


Electrical Connections: 115 volts, 60 Hertz, single phase. Unit has a 8' (2.4m) long cord and plug.






F18MCV




F18MC39AV




F18MC39DV






F18MC52AV




F18MC52DV

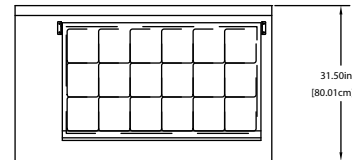


F18MC52EV




F18MCV




F18MC60AV

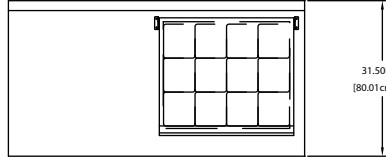






F18MC60DV




F18MC60EV




F18MC60FV

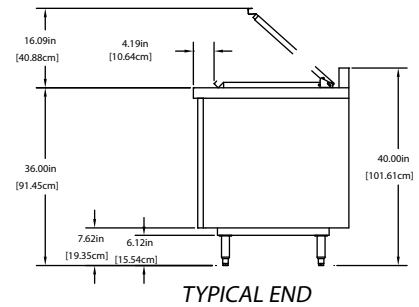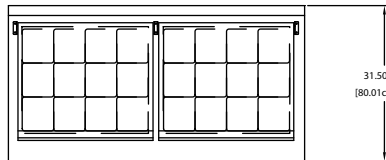


Mechanical Data




SELF CONTAINED




REMOTE



Door Swing

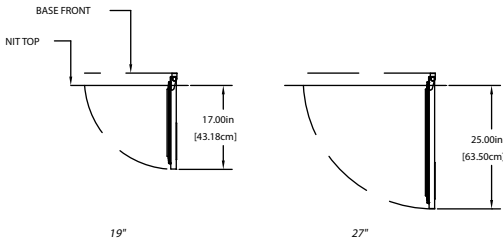

Remote Appearance



F18MCV

Specifications											
Model	Number of Doors	1/6 Size Pans	Volume	BTU Load @ 86F Base/Rail	BTU Sys. Cap 86F Base/Rail	H.P.	V/Hz/Ph	Amps	Nema Plug	Ship Weight	KWH
F18MC39AV	(1)19"	6	4.11	241/152	2149/662	1/4	115/60/1	7	5-15P	410lbs/186kg	0.83
F18MC39DV	(1)19"	12	4.11	241/203	2149/813	1/4	115/60/1	7	5-15P	400lbs/181kg	0.83
F18MC52AV	(1)19"	6	6.94	309/152	2149/793	1/4	115/60/1	7	5-15P	470lbs/213kg	1
F18MC52DV	(1)19"	12	6.94	309/304	2149/813	1/4	115/60/1	7	5-15P	460lbs/208kg	1
F18MC52EV	(1)19"	18	6.94	309/456	2149/931	1/4	115/60/1	7	5-15P	450lbs/204kg	1
F18MC60AV	(1)19" & (1)27"	6	8.69	241/152	2149/662	1/4	115/60/1	7	5-15P	510lbs/231kg	1.11
F18MC60DV	(1)19" & (1)27"	12	8.69	241/304	2149/813	1/4	115/60/1	7	5-15P	500lbs/227kg	1.11
F18MC60EV	(1)19" & (1)27"	18	8.69	241/456	2149/931	1/4	115/60/1	7	5-15P	490lbs/222kg	1.11
F18MC60FV	(1)19" & (1)27"	24	8.69	241/608	2149/1026	1/4	115/60/1	7	5-15P	480lbs/217kg	1.11

Model	Number of Doors	1/6 Size Pans	Volume	BTU Load @ 86F Base/Rail	BTU Sys. Cap 86F Base/Rail	V/Hz/Ph	Amps	Nema Plug	Ship Weight
18MR31AV	(1)19"	6	4.11	241/152	1350/662	115/60/1	3	5-15P	350lbs/159kg
18MR44AV	(2)19"	6	6.94	309/152	1350/662	115/60/1	3	5-15P	390lbs/177kg
18MR44DV	(2)19"	12	6.94	309/304	1350/813	115/60/1	3	5-15P	380lbs/172kg
18MR52AV	(1)19" & (1)27"	6	8.69	241/152	1350/662	115/60/1	3	5-15P	440lbs/190kg
18MR52DV	(1)19" & (1)27"	12	8.69	241/304	1350/813	115/60/1	3	5-15P	430lbs/195kg
18MR52EV	(1)19" & (1)27"	18	8.69	241/456	1350/931	115/60/1	3	5-15P	420lbs/190kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
5919A_DEL_F18MCV
03/17

