

Model Number


| | |
|-----------|------------|
| IFSCB150E | IFSCB150EU |
| IFSCB250E | IFSCB250EU |
| IFSCB350E | IFSCB350EU |
| IFSCB450E | IFSCB450EU |
| IFSCB550E | IFSCB550EU |
| IFSCB650E | IFSCB650EU |

Add suffix "T" for Electronic Thermostat


Add suffix "C" for Computer Controls

Suffix "E" denotes Immersed Elements

Suffix "EU" denotes Tilt-up Elements



Filter is located under fryers to save valuable space.



Filter pan is designed for maximum oil return.



5.5 GPM, 1/3 HP roller pump speeds up filtering process.



Side Car includes a stainless steel cabinet with a drain area, food warmer and dump pan.



FILTER PACKAGE CHOICES - Up to six fryers can be battered into one fryer / filter system.

- Available for 50 and 75 lb. (27 and 41 Liters) oil capacity fryers.
- Available with Snap Action Thermostats, Electronic Thermostats or Computer Controls

LOCATED UNDER FRYERS - Filter location under fryers saves valuable space.

- Internally plumbed oil drain and return line.

UNIQUE FILTER PAN DESIGN - Filter pan is designed for maximum oil return.

- Stainless steel construction is easy to clean and has a professional look.
- Positive-latching filter paper holder holds paper in place for optimal filtration.
- Quick disconnect connection offers quick and safe connection of the filtered oil back into the frypots.
- All oil drain and return lines are internally plumbed for convenience and safety.

ROLLER-PUMP - Up to six fryers can be battered into one fryer / filter system.

- 5.5 GPM pump with a 1/3 HP motor speeds up filtering process.
- Can pump oil into a disposal vat up to 20 feet away.


DRAIN STATION - Includes a matching stainless steel cabinet with a food warmer and dump pan.

- Cabinet may be located anywhere within the fryer battery.
- Cabinet is a convenient storage area when located at the end of the battery.

EXTERIOR FEATURES - Continuous cabinet provides a professional look.

- 5" (127 mm) deep continuous stainless steel front landing ledge.
- Stainless steel precision welded frypot.
- Includes casters, joiner strips and filter starter kit.



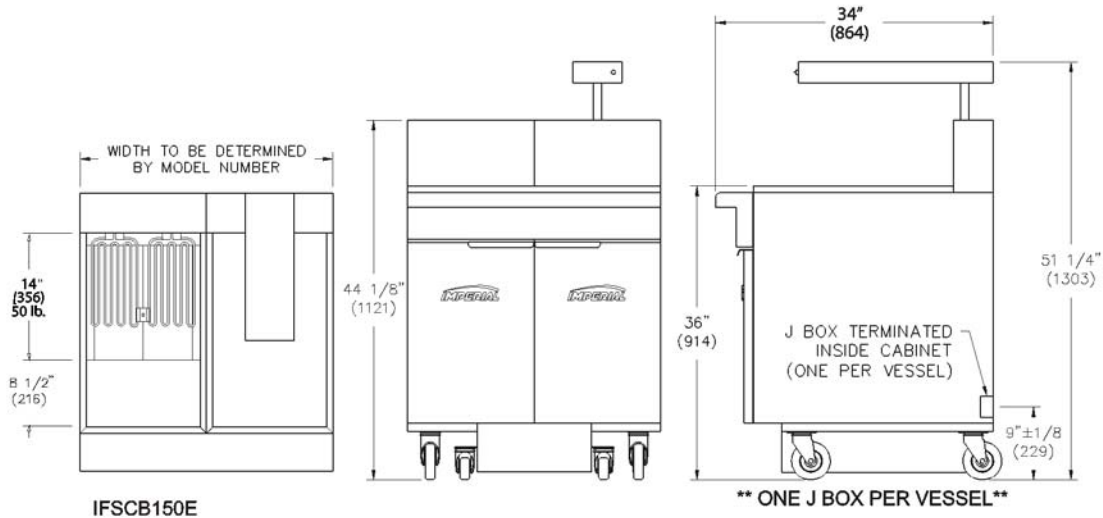

| MODEL | FRYER OIL CAPACITY | OVERALL WIDTH | NUMBER OF FRYERS | SHIP WEIGHT (KG) | LBS |
|-----------|--------------------|--------------------|------------------|------------------|-------|
| IFSCB150E | 50 lbs. (41 L) | 31" (787 mm) | 1 | (196) | 433 |
| IFSCB250E | 50 lbs. (41 L) | 46-1/2" (1181 mm) | 2 | (311) | 626 |
| IFSCB350E | 50 lbs. (41 L) | 62" (1575 mm) | 3 | (426) | 393 |
| IFSCB450E | 50 lbs. (41 L) | 77-1/2" (1969 mm) | 4 | (541) | 1,092 |
| IFSCB550E | 50 lbs. (41 L) | 93" (2362 mm) | 5 | (655) | 1445 |
| IFSCB650E | 50 lbs. (41 L) | 108-1/2" (2756 mm) | 6 | (770) | 1698 |

Measurements in () are metric equivalents.

| FILTER ELECTRICAL REQUIREMENT | | | |
|-------------------------------|-------|-------|----------|
| VOLTS | PHASE | HERTZ | AMPS |
| 115 V | 1 | 60 | 6.8 amps |

| ELECTRICAL REQUIREMENT PER FRYER | | | | |
|----------------------------------|-------|-------|-------|-------|
| MODEL | VOLTS | PHASE | HERTZ | AMPS |
| 50 lbs. | 208 | 3 | 60 | 42.38 |
| 50 lbs. | 240 | 3 | 60 | 36.73 |
| 50 lbs. | 480* | 3 | 60 | 18.36 |

* For export only

| MODEL | DIMENSIONS | CRATED DIMENSIONS |
|-----------|--|---|
| IFSCB150E | 31" w x 34" d x 44-1/8" h (787 x 864 x 1121 mm) | 32-1/2" w x 39" d x 49-1/2" h (826 x 991 x 1257 mm) |
| IFSCB250E | 46-1/2" w x 34" d x 44-1/8" h (1181 x 864 x 1121 mm) | 48" w x 39" d x 49-1/2" h (1219 x 991 x 1257 mm) |
| IFSCB350E | 62" w x 34" d x 44-1/8" h (1575 x 864 x 1121 mm) | 63-1/2" w x 39" d x 49-1/2" h (1613 x 991 x 1257 mm) |
| IFSCB450E | 77-1/2" w x 34" d x 44-1/8" h (1969 x 864 x 1121 mm) | 79" w x 39" d x 49-1/2" h (2007 x 991 x 1257 mm) |
| IFSCB550E | 93" w x 34" d x 44-1/8" h (2362 x 864 x 1121 mm) | 94-1/2" w x 39" d x 49-1/2" h (2400 x 991 x 1257 mm) |
| IFSCB650E | 108-1/2" w x 34" d x 44-1/8" h (2756 x 864 x 1121 mm) | 110" w x 39" d x 49-1/2" h (2794 x 991 x 1257 mm) |

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Legs or casters are required for non-combustible floors. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

OPTIONS AND ACCESSORIES

- Automatic basket lifts with computerized controls
- Manual controlled basket lifts
- Stainless steel tank cover
- Stainless steel side drain shelf
- Stainless steel side splash
- Manual timer
- Filter paper 40# thickness, 20 microns, 100 sheets per box

