

## Toastmaster® Electric Built-In Drawer Warmers

One Drawer Warmers 3A20AT09 3A80AT09 3A80AT72Two Drawer Warmers 3B20AT09 3B20AT72 3B80AT09 3B80AT72 3B84AT09 3B84AT72Three Drawer Warmers 3C80AT09 3C80AT72**3A80AT09**

### DESCRIPTION

Hot food servers are designed to hold cooked foods at a safe, thermometer verified serving temperature and proper moisture content. Hot food can be placed into the drawer either directly or in separate open pans or containers. Holding temperature and moisture content can be set for the type of food being held. Unit is designed to hold precooked foods at serving temperature, ideal for baked potatoes, vegetables, ribs, buns and rolls.

### SPECIFICATIONS

Freestanding, drawer-type hot food server. The drawer is furnished with a removable, deep drawn stainless steel pan. Heating is accomplished with performed tubular heating elements. Each drawer holds a 5-1/4" deep pan, either 12"x20" or 16"x16", depending on model. Fully insulated on all six sides, including drawer fronts. The frame is of welded and reinforced sheet steel. The exterior cabinet and drawer fronts are of stainless steel with an aluminized steel inner lining. Drawers are equipped with a handle operated latching mechanism and positive stop. Drawers glide on third member suspension system rails. Third members have five (5) roller bearings (load support) and five (5) guide bearings (smooth operation) each (i.e. twenty (20) bearings per drawer). Temperature is regulated by hydraulic thermostat adjustable from 100°F to 200°F, with "OFF" position. Thermostat control is mounted on front below the drawer and is equipped with adjacent signal light. Thermostat knob is protected by a knob guard. The moisture control adjustment knob is located at the center front above the drawer. A thermometer accurately reflects the temperature at the coolest point inside the server. This safety feature helps ensure that food products are being held at a temperature above the bacterial growth level, and at temperatures below those that may over cook or dry out food product.

### FEATURES

- Each drawer holds a 5-1/4" deep pan, either 12"x20" or 16"x16", depending on model
- Adjustable thermostat from 100°F to 200°F, with "OFF" position
- Positive-action spring-loaded drawer latch
- Rugged third-member drawer rail
- Individual drawer moist/crisp control
- Single thermostat with "safety zone" green
- Fully insulated on all six sides
- 20 bearings per drawer
- May be installed in wood fixtures
- Integrated trim

### WARRANTY

These units come with a one [1] year warranty for parts and labor.

### CERTIFICATIONS




# Toastmaster® Toastmaster® Electric Built-In Drawer Warmers

One Drawer Warmers □3A20AT09 □3A80AT09 □3A80AT72

Two Drawer Warmers □3B20AT09 □3B20AT72 □3B80AT09 □3B80AT72 □3B84AT09 □3B84AT72

Three Drawer Warmers □3C80AT09 □3C80AT72

## SIDE VIEW

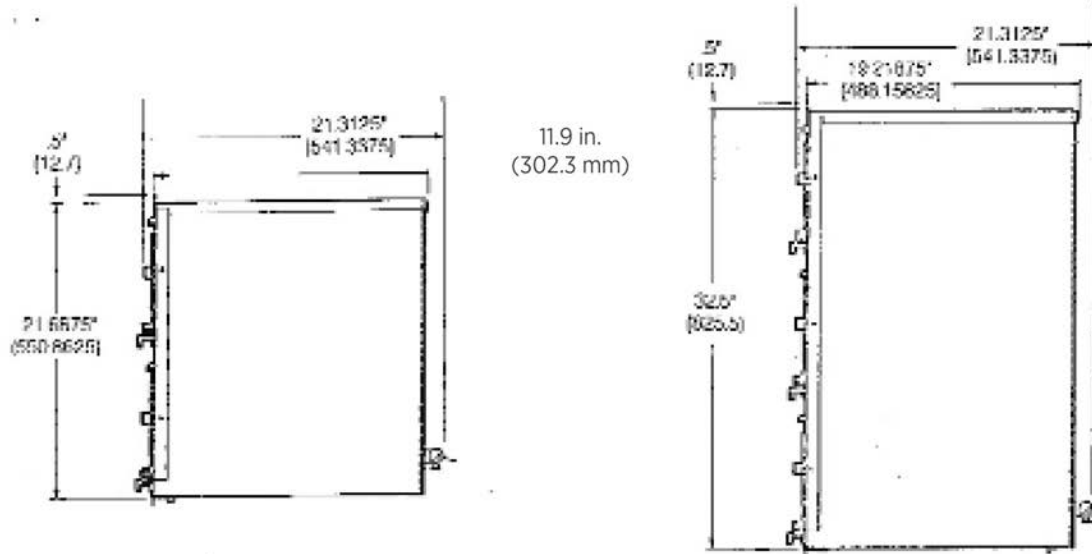

MODEL	NUMBER OF T-STATS	STEAM PAN SIZE (IN.)	WIDTH in. (mm)	DEPTH in. (mm)	HEIGHT in. (mm)	VOLTS <sup>1</sup>	kW	AMPS	APPROX. SHIP WEIGHT
<b>ONE (1) DRAWER WARMERS</b>									
3A20AT09	1	16x16x5	23.06 (585.7)	23.00 (584.2)	12.13 (308.1)	120	450	3.91	82 lb. (27.2kg)
3A80AT09	1	20x12x5	29.19 (741.4)	19.53 (496.1)	10.88 (276.4)	120	400	1.97	84 lb. (38.1 kg)
3A80AT72	1	20x12x5	29.19 (741.4)	19.53 (496.1)	10.88 (276.4)	208/240	400/540	1.97/1.96	84 lb. (38.1 kg)
<b>TWO (2) DRAWER WARMERS</b>									
3B20AT09	1	16x16x5	23.19 (589.0)	23.00 (584.2)	22.75 (577.9)	120	1,000	8.33	138 lb. (62.7 kg)
3B20AT72	1	16x16x5	23.19 (589.0)	23.00 (584.2)	22.75 (577.9)	208/240	900/1,200	4.33/4.58	138 lb. (62.7 kg)
3B80AT09	1	20x12x5	29.19 (741.4)	19.53 (496.1)	21.75 (552.5)	120	1,000	8.33	144 lb. (65.4 kg)
3B80AT72	1	20x12x5	29.19 (741.4)	19.53 (496.1)	21.75 (552.5)	208/240	900/1,200	4.33/4.33	144 lb. (65.4 kg)
3B84AT09	2	20x12x5	29.19 (741.4)	19.53 (496.1)	21.75 (552.5)	120	900	7.83	144 lb. (65.4 kg)
3B84AT72	2	20x12x5	29.19 (741.4)	19.53 (496.1)	21.75 (552.5)	208/240	850/980	4.09/4.08	144 lb. (65.4 kg)
<b>THREE (3) DRAWER WARMERS</b>									
3C80AT09	1	20x12x5	29.19 (741.4)	19.53 (496.1)	29.18 (741.2)	120	1,350	11.74	186 lb. (84.4 kg)
3C80AT72	1	20x12x5	29.19 (741.4)	19.53 (496.1)	29.18 (741.2)	208/240	1,220/1,600	5.87/5.88	186 lb. (84.4 kg)

<sup>1</sup>Specify 120V or 208/240V Service when ordering. All built-in drawer warmers are field wired.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

**Toastmaster®** • www.ToastmasterCorp.com

10 Sunnen Drive • Saint Louis, Missouri 63143

Telephone 314 678 6347 • Fax 314 781 5445

Printed in the U.S.A. • 2M-Z2xxx • Rev - • 2.2017  
Please refer to the owner's manual for information regarding installation or use.