

## REMOTE PASS-THRU BACK BAR REFRIGERATOR 4- AND 6-DOOR









JOB	
AREA	
ITEM NO.	
MODEL NO.	

	PTR48	4-Door Model
	PTR72	6-Door Model

NSF/ANSI Standard 7 Listed for open food storage. Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.


MODEL NUMBERS		PTR48	PTR72
NUMBER OF DOORS		4	6
EXTERIOR	Length - in. (mm)	48 (1219)	72 (1829)
CABINET DIMENSIONS	Depth - in. (mm)	2611/16 (678)	2611/16 (678)
	Height - in. (mm)	34% (878)	34% (878)
INTERIOR	Length - in. (mm)	44 (1118)	68 (1727)
CABINET DIMENSIONS	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	28½ (724)	28½ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		16.6 (470)	25.7 (728)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	321/513	523/819
TRODUCT CAPACITY	STAGGERED - 12 OZ. BOTTLE/CAN	346/549	565/879
SHIPPING WEIGHT Lbs. (kg.)		358 (117)	385 (175)
	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.6	2
ELECTRICAL	Electrical Connection	Hard wired	Hard wired
SPECIFICATIONS	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Lighting Type	LED	LED
	Expansion Device	TXV	TXV
REFRIGERATION SPECIFICATIONS	Evaporator Capacity - Remotes	1900 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R404a	R134a & R404a
PLUMBING	Evaporator Condensate	Field plumbed	Field plumbed

Form No. 95173 Rev. 04.29.2020



## REMOTE PASS-THRU BACK BAR REFRIGERATOR 4- AND 6-DOOR

Note: Open floor drain not provided on models intended for non-packaged food.

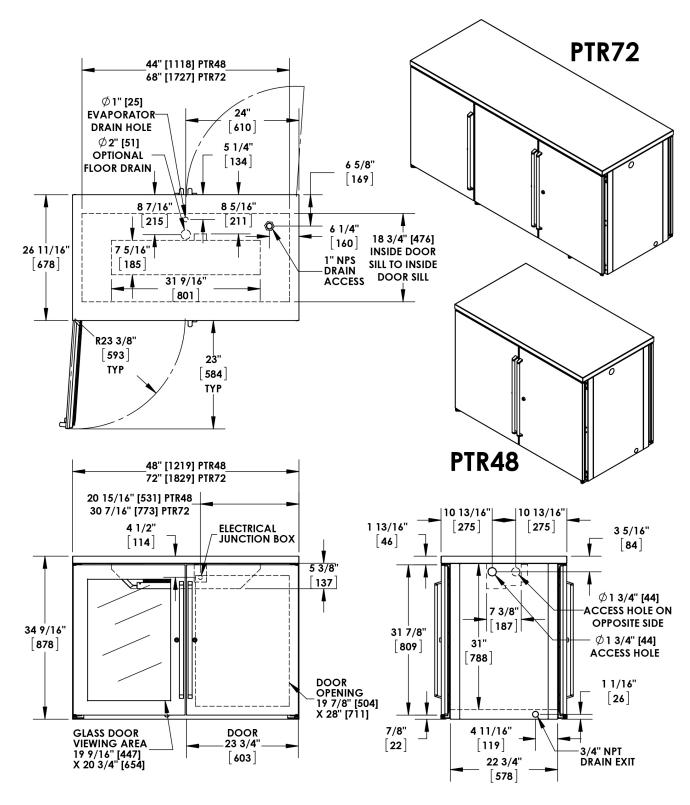

## **California Prop 65 Notice:**



**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm, For more information go to www.P65Warnings.ca.gov.