DESIGNER LINE SANDWICH UNIT

Model: D72N27M-D Natural Refrigerant R-290 Model



72" Mighty Top Sandwich Unit Refrigerator with Drawers - 27 Pans

Stainless steel front, top and end panels and interior.



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel back	Rear-mounted cutting board
Overshelves (single or double)	Composite cutting board
Drawer locks	Flat insulated night cover
Crumb catcher	Vision panel lid
Casters	Modified pan openings

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Natural, environmentally-safe, high-efficiency R-290 refrigerant ¹
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor
Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation	
Smooth, polished chrome drawer handles	
Stainless steel roll-out drawers	
Magnetic snap-in drawer gaskets	
8" deep, full length nylon cutting board	
Insulated lids	
Completely enclosed, vented and removable case back	
6" adjustable stainless steel legs	

MODEL FEATURES

(27) 1/6 size recessed pans, 4" deep
Removable interior tub below pans
Electronic controller w/digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20.6 (583 cu l)
1/6 Size Pans (4" deep)	27
Width, Overall (in.)	72 (1829 mm)
Depth, Overall (in.) (incl. bumpers)	35 (890 mm)
Depth, Cutting Board (in.)	8 (203 mm)
Height, Overall (in.) (incl. 6" legs)	43 1/4 (1099 mm)
No. of Drawers	6

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2560


ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	6.1 (4.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	414 (188 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	80 (2032 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS



* Rating @ $+25^{\circ}F$ evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.






Model Plan Views

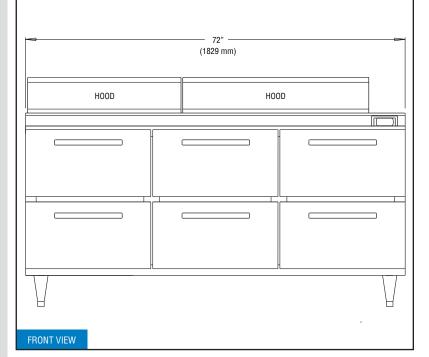

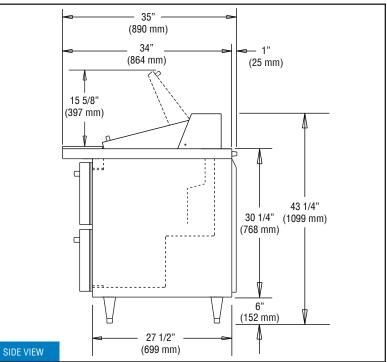

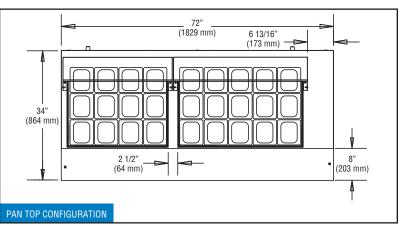

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.