DESIGNER LINE BASE MODEL

Model: DRA60NSSBS

Natural Refrigerant R-290 Model

60" Base Worktop Refrigerator with Solid Doors and 5 1/2" Backsplash

ENERGY STAR® Qualified Commercial Refrigerator

Heavy gauge #300 Series stainless steel top, stainless steel front, end panels and interior, galvanized steel rear and grill.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel back	Casters	
Overshelves (single or double)	Door lock	
Add'l epoxy-coated steel shelves	Front breathing	
Stainless steel shelves	Drawer in lieu of door section above the condensing unit*	
Pan slides (large door section only)	Condensing unit left (standard on right)	

Consult factory for other model configurations, options and accessories.

*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

Project Name: Vesigner line **Model Specified:** Location: Item No: Quantity: AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Natural, environmentally-safe, high-efficiency R-290 refrigerant ¹
Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor
Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
Completely enclosed, vented and removable rear and side grills
6" adjustable stainless steel legs

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm
Electronic control, off-cycle defrost
Refrigerated section w/door above the condensing unit

Field rehingeable doors

¹ R-290 refrigerant meets all federal and state regulatory requirements.

NOTE: DRA60 models come standard with a door over the condensing unit, a smaller width door (left section) and larger width door (center section). A drawer over the condensing unit is an option. The option of having the door/drawers located in the opposite sections <u>MUST</u> be indicated at the time of ordering.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:



Model Specifications

Net Capacity (cu. ft.)	19 (538 cu l)
Width, Overall (in.)	60 (1524 mm)
Depth, Overall (in.) (incl. handles & bumpers)	36 5/16 (922 mm)
Height, Overall (in.) (incl. 6" legs)	41 1/2 (1054 mm)
Shelf Area (sq. ft.)	7.1 (.7 sq m)
No. of Shelves	4
No. of Full Doors	2
No. of Half Doors	1
Interior Depth (in.)	30 (762 mm)
Interior Height (in.)	26 (660 mm)
Interior Height (in.) (above condenser)	12 1/2 (318 mm)
Interior Width (in.)	56 (1422 mm)

REFRIGERANT DATA

DIMENSIONAL DATA

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU/Hr)*	3100

ELECTRICAL DATA


Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	4.5 (2.3)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	425 (193 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	62 (1575 mm)
Depth - Crated (in.)	47 (1194 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.






MADE IN THE U.S.A.

Model Plan Views

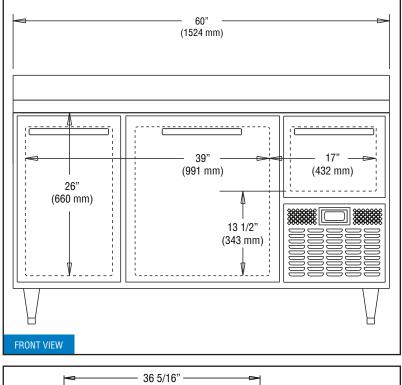

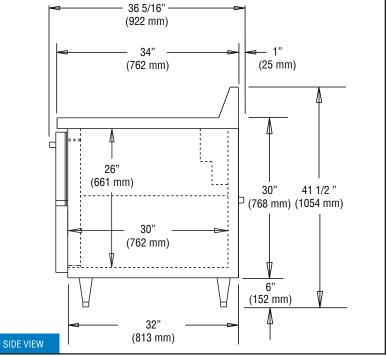

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.