# WORKTOP REFRIGERATOR

## **Model: SW48NBS**

Natural Refrigerant R-290 Model

# 48" Worktop Refrigerator with Solid Doors and 5 1/2" Backsplash



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



# Continental

### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Expansion valve system
Stainless steel back	Adjustable legs
Overshelves (single or double)	Door locks
Add'l epoxy-coated steel shelves	Special electrical requirements (consult factory)
Stainless steel shelves	

Consult factory for other model configurations, options and accessories.

### Standard Model Features

### REFRIGERATION SYSTEM

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

Completely enclosed, vented and removable case back

5" casters

### **MODEL FEATURES**

Electronic controller w/digital display & hi-low alarm

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

### **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	13.4 (379 cu I)
Width, Overall (in.)	48 (1219 mm)
Depth, Overall (in.) (incl. handles & bumpers)	32 3/16 (818 mm)
Height, Overall (in.) (incl. 5" casters)	40 3/4 (1035 mm)
Shelf Area (sq. ft.)	6.8 (.6 sq m)
No. of Shelves	2
No. of Doors	2
Interior Depth (in.)	See Drawing
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	44 (1118 mm)

### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1625

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	2.46 (1.85)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### **SHIPPING DATA**

Weight (lbs.)	258 (117 kg)
Height - Crated (in.)	48 3/4 (1238 mm)
Width - Crated (in.)	56 (1422 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

### **Model Plan Views**

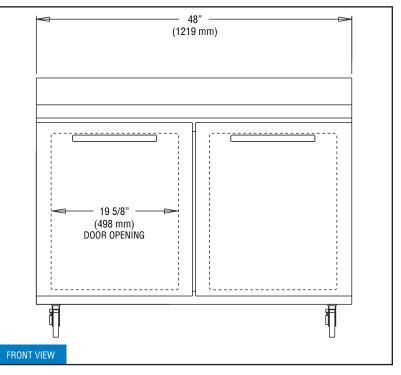

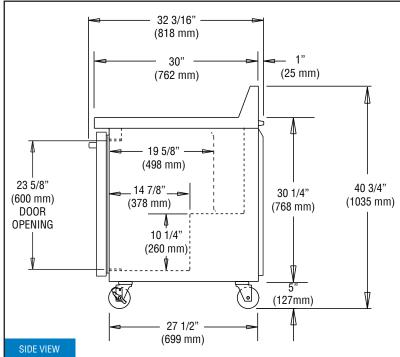

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>