WORKTOP FREEZER (0°F)

Model: SWF27N

Natural Refrigerant R-290 Model

27" Worktop Freezer with Solid Door

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Stainless steel shelves
Stainless steel back	Adjustable legs
Overshelves (single or double)	Door lock
Add'l epoxy-coated steel shelves	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name: Model Specified: Location: Item No: Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA#:

Performance-rated refrigeration system Natural, environmentally-safe,

high-efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation Smooth, polished chrome door handle

Spring loaded, self closing door

Magnetic snap-in door gasket

Heavy-duty, epoxy-coated steel shelf

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Field rehingeable door

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	7.4 (210 cu I)
Width, Overall (in.)	27 1/2 (699 mm)
Depth, Overall (in.) (incl. handle & bumpers)	32 3/16 (818 mm)
Height, Overall (in.) (incl. 5" casters)	35 1/4 (895 mm)
Shelf Area (sq. ft.)	0.5 (0.5)
Olioli Aloa (34. it.)	3.5 (.3 sq m)
No. of Shelves	3.5 (.3 sq m)
, , ,	` ' /

26 1/4 (667 mm)

24 1/2 (622 mm)

REFRIGERANT DATA

Interior Height (in.)

Interior Width (in.)

Condensing Unit Size (H.P.)	1/4	
Capacity (BTU/Hr)*	1572	

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	4.0 (2.8)
Defrost Amps (int'l)	4.8 (2.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA

Weight (lbs.)	165 (75 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	35 1/2 (902 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

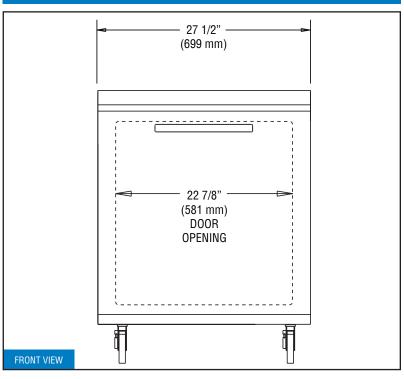

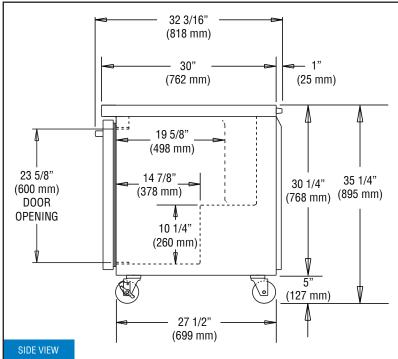

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>