WORKTOP FREEZER (0°F)

Model: SWF27NBS-D

Natural Refrigerant R-290 Model

27" Worktop Freezer with Drawers and 5 1/2" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel interior	Adjustable legs	
Stainless steel back	Drawers locks	
Overshelves (single or double)	Special electrical requirements (consult factory)	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system Natural, environmentally-safe, high-efficiency R-290 refrigerant¹ Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation Smooth, polished chrome drawer handles Stainless steel roll-out drawers Magnetic snap-in drawer gaskets Completely enclosed, vented and removable case back 5" casters

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATANet Capacity (cu. ft.)7.4 (210 cu l)Width, Overall (in.)27 1/2 (699 mm)Depth, Overall (in.)
(incl. handles & bumpers)32 3/16 (818 mm)Height, Overall (in.) (incl. 5" casters)40 3/4 (1035 mm)No. of Drawers (two tier)2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1572

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Total Amps (int'l)	4.0 (2.8)
Defrost Amps (int'l)	4.8 (2.4)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA


Weight (lbs.)	170 (77 kg)
Height - Crated (in.)	48 3/4 (1238 mm)
Width - Crated (in.)	35 1/2 (902 mm)
Depth - Crated (in.)	37 1/4 (946 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer

* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.





MADE IN THE U.S.A.

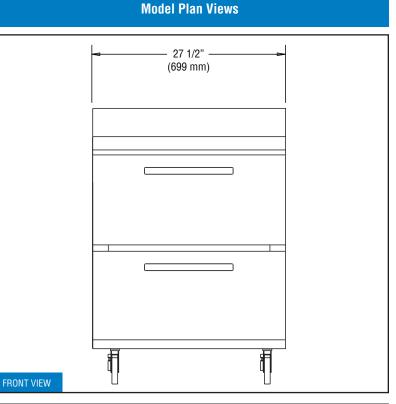

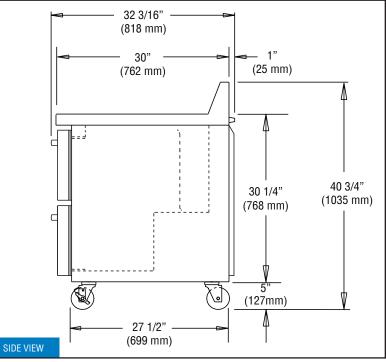

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.

© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.